

LED Flutlicht ZERO



I. Product Characteristics:

- The product is the perfect combination of aesthetics and products, based on the theory of the Fluid Mechanics.
- Besides silicone, the clips on both sides are also tightly held the glass cover. Double protection for real higher waterproof rate IP66.
- High-quality aluminum 12#, the outer appearance gets electrostatic painting to have nice corrosion resistance, able to use in hostile surroundings.
- SUS304 screws and high-strength bracket to reach 360° free adjustment, very strong and permanent use.
- IK07 tempered glass, striped processing to stop the glare.
- Able to use OSRAM/PHILIPS2835 imported LED light sources.
- The product adopts DOB solution, more economic and stable work.


II. Technical Parameters:

Work Voltage	220V
Light Source	SMD2835 LEDs
Driver Mode	DOB constant-current
CCT	2700K-6500K
Light Efficiency	90-100lm/W
Suring	2KV
Beam Angle	120°
Body Color	Grey
PF	>0.95
CRI	80Ra
Life Span	30000H

III. Product Series:

Model	Voltage	Light Efficiency	Light Source	Size
SU-CBA50W	AC220V	90-100LM/W	SMD2835	L196*W149*H25mm
SU-CBA100W	AC220V	90-100LM/W	SMD2835	L270*W206*H30mm
SU-CBA200W	AC220V	90-100LM/W	SMD2835	L372*W282*H41mm

IV. Dimension:

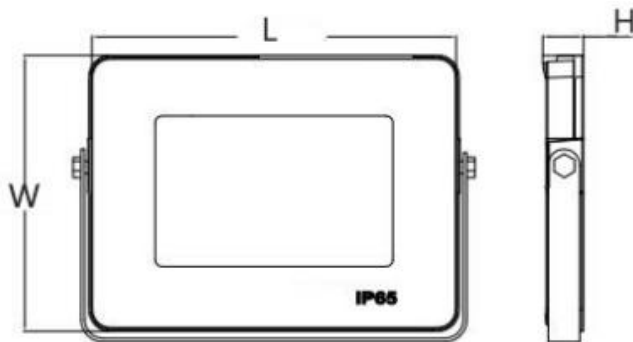

V. Light distributions and lumination:

