

50M/2835 high voltage constant current Led Flex strips/

120pcs led/meter/AC220-240V/10mm

- Direct 220V-240V input ,No need external Power supply.
- Low voltage drop assure same brightness on whole 50 meters,Cutttable every 0.1 meter.
- Leds of the same BIN,with consistant color.
- IP grade: IP67.
- Fast installation by Silicone Mounting Clips.



Application:

Widely used in hotels、shopping malls、furniture、cabinets、shelf, as decoration lighting, direct lighting or indirect lighting

Installation:

Silicone Mounting Clips

Warranty:

3 years



Optical&Electric:

Product Model	Color	CCT (K)	Ra	Beam angle (°)	Lumen (lm/m)	Efficiency (lm/W)	Voltage (V AC)	Current (mA/m)	Power (W/m)
SW-HVF2835W60-50M-230	WW	2700	≥80	120	1335	89	230	65	15
SW-HVF2835W60-50M-230	WW	3000	≥80	120	1365	91	230	65	15
SW-HVF2835W60-50M-230	WW	3500	≥80	120	1395	93	230	65	15
SW-HVF2835N60-50M-230	NW	4000	≥80	120	1455	97	230	65	15
SW-HVF2835C60-50M-230	CW	6000	≥80	120	1410	94	230	65	15



Lumina Swiss GmbH
Lerzenstrasse 21
8953 Dietikon

info@lumina-swiss.ch
044 750 6474

50M/2835 high voltage constant current Led Flex strips/

120pcs led/meter/AC220-240V/10mm



Other features:

Product Model	IP grade	Working environment (°C)	Storage environment (°C)	Length (m)	Max connection Length (m)	LED Qty (pcs/m)	N.W (g/Roll)
SW-HVF2835W60-50 M-230	IP67	-30~+60	-40~+70	50	50	120	5000

Notes:

- Testing environment temperature: $25\pm 2^{\circ}\text{C}$;
- Above data confirmed on the basis of 1M sample, 3000k, IP67.
- Mark"—" means no testing requirement.

Dimensions:

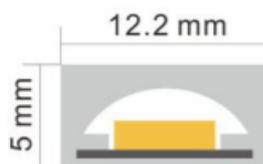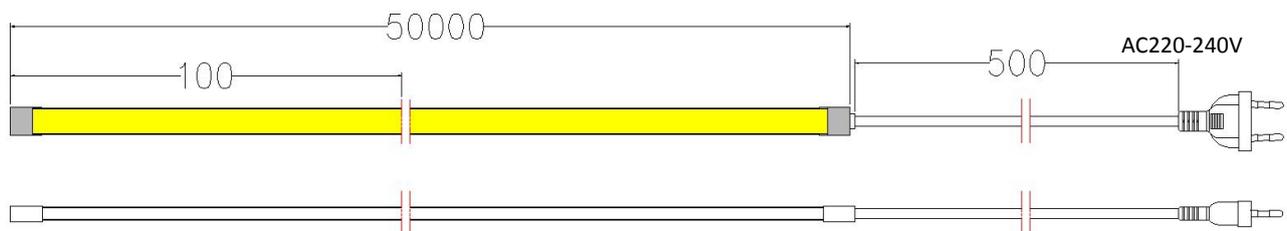

IP67
(Extrusion
Molding)




Lumina Swiss GmbH
Lerzenstrasse 21
8953 Dietikon

info@lumina-swiss.ch
044 750 6474

50M/2835 high voltage constant current Led Flex strips/



120pcs led/meter/AC220-240V/10mm

Electric principle:

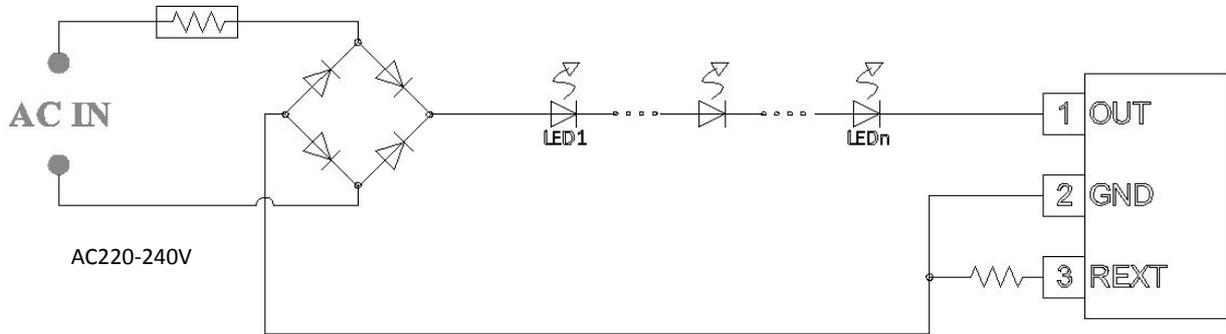

Optical/Lux graph:

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

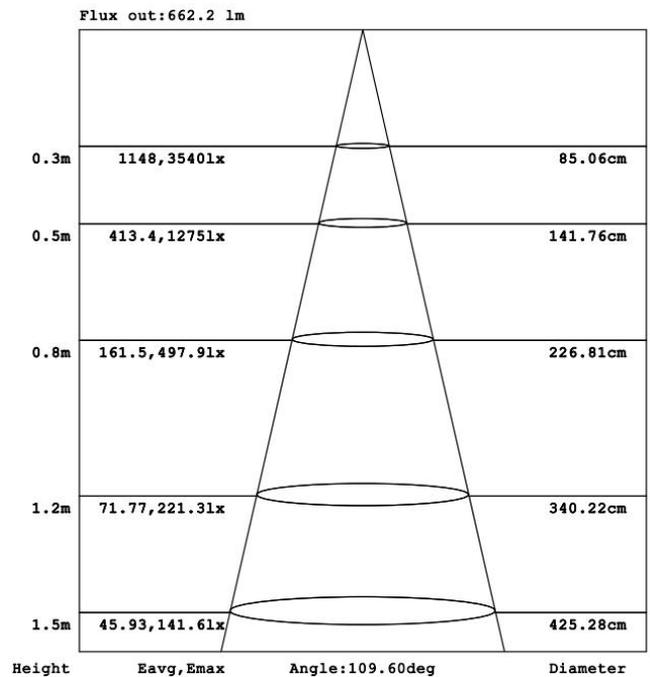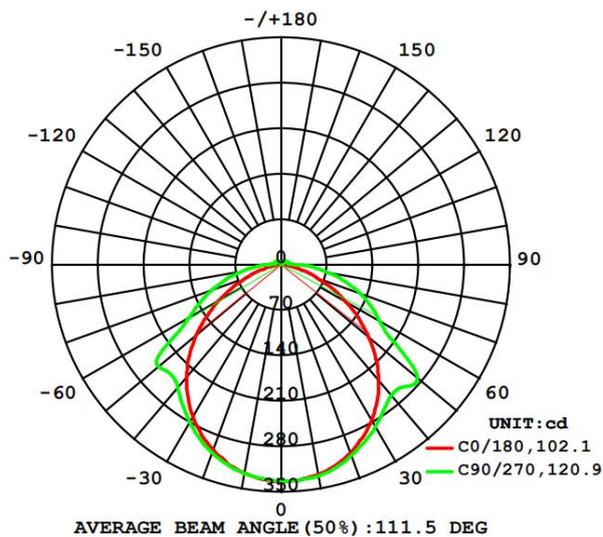

Lumina Swiss GmbH
Lerzenstrasse 21
8953 Dietikon

info@lumina-swiss.ch
044 750 6474